

# PRODUCT DATASHEET

## AUTO TRANSFORMER RANGE



Manufactured to **BS2234 & BS171**.

Fully shrouded construction.

Can be used to step up or step down incoming supply

These products do **not** provide Mains Isolation.

Connection via screw terminal block.

Frequency	50/60	Hz
Max Ambient	25	°C
Bobbin Material 50-500VA	UL94-HB	"B" 130 °C
Bobbin Material 1000VA	UL94-HB	"A" 105 °C

Part No	VA	Voltage	Weight (Kg)
D3704	50	0-115-230	1.6
D3705	100	0-110-220-240	2
D3706	150	0-110-220-240	2.4
D3707	250	0-110-220-240	4
D3708	500	0-110-220-240	6.5
D3709	1000	0-110-220-240	10.5

Please see sheet 2 for outline drawing and connection info.


Dagnall Electronics Ltd  
 Tel : +44 (0)117 230 2240  
[sales@dagnall.co.uk](mailto:sales@dagnall.co.uk)  
[www.dagnall.co.uk](http://www.dagnall.co.uk)

TRX Electronics Ltd  
 Tel : (00356)21 663011  
[info@trxelectronics.com](mailto:info@trxelectronics.com)  
[www.trxelectronics.com](http://www.trxelectronics.com)

# PRODUCT DATASHEET

## AUTO TRANSFORMER

Outline Drawing

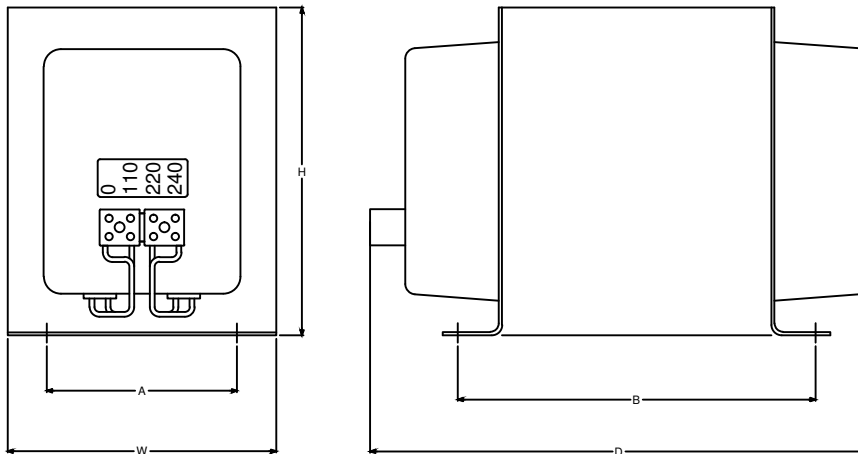


PART	RATING VA	DIMENSIONS			FIXINGS		
		D	W	H	A	B	SIZE
D3704	50	77	56	69	45	40	M4
D3705	100	106	80	97	64	50	M4
D3706	150	118	80	97	64	64	M4
D3707	250	116	95	116	77	66	M6
D3708	500	137	112	135	92	70	M6
D3709	1000	181	112	135	92	112	M6


# PRODUCT DATASHEET

## AUTO TRANSFORMER


D3704 Connections

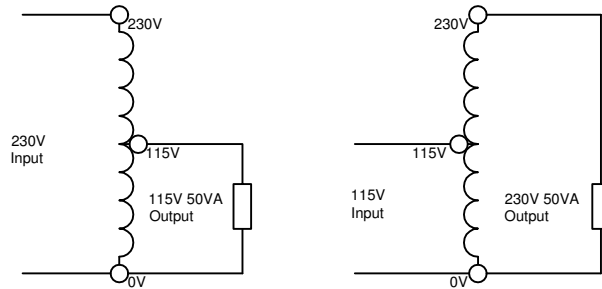

D3705 Connections

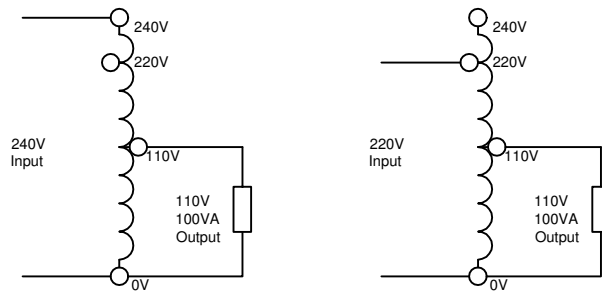

D3705 Connections

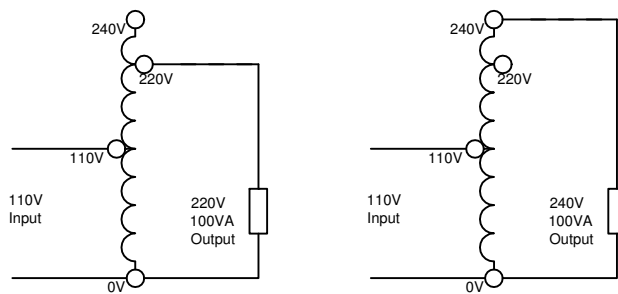

D3705 Connections

