


# PRODUCT DATASHEET

## 100VA Chassis MOUNTED TRANSFORMER



Designed, Manufactured and tested in accordance with **BS415**  
 Dual Primaries, for 110, 220 and 240V Inputs  
 Comprehensive choice of Secondary Voltages  
 4KV Isolation Primary to Secondary  
 Fully shrouded double section construction

Weight	1.4	Kg
Typical Regulation	9	%
Frequency	50/60	Hz
Max Ambient	25	°C
Bobbin Material	UL94-HB Class "B" 130°C	

### Part Numbers

Part No	Primary	Secondary	Recommended Secondary Fuse
D3677	0-110 0-110-130V	6+6V	8.00 A
D3678	0-110 0-110-130V	9+9V	5.00 A
D3679	0-110 0-110-130V	12+12V	4.00 A
D3680	0-110 0-110-130V	15+15V	3.15 A
D3681	0-110 0-110-130V	18+18V	2.50 A
D3682	0-110 0-110-130V	20+20V	2.50 A
D3683	0-110 0-110-130V	24+24V	2.00 A
D3684	0-110 0-110-130V	30+30V	1.60 A
D3685	0-110 0-110-130V	50+50V	1.00 A




Please see sheet 2 for dimensions, pin outs and connection information.

Dagnall Electronics Ltd  
 Tel : +44 (0)117 230 2240  
[sales@dagnall.co.uk](mailto:sales@dagnall.co.uk)  
[www.dagnall.co.uk](http://www.dagnall.co.uk)

TRX Electronics Ltd  
 Tel : (00356)21 663011  
[info@trxelectronics.com](mailto:info@trxelectronics.com)  
[www.trxelectronics.com](http://www.trxelectronics.com)

# PRODUCT DATASHEET

## 100VA CHASSIS MOUNTED TRANSFORMER

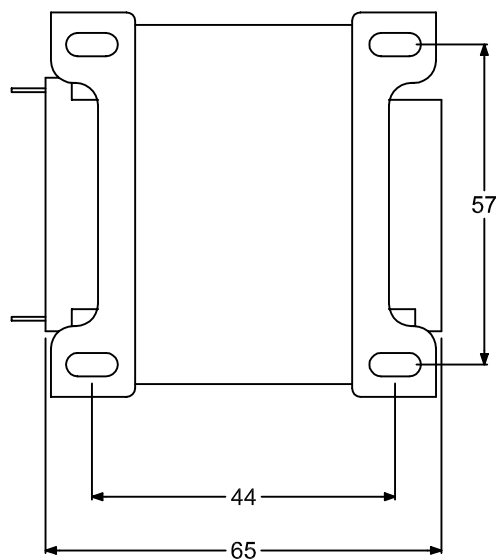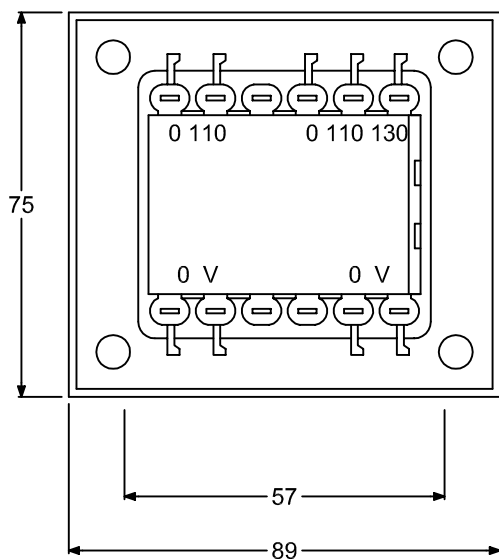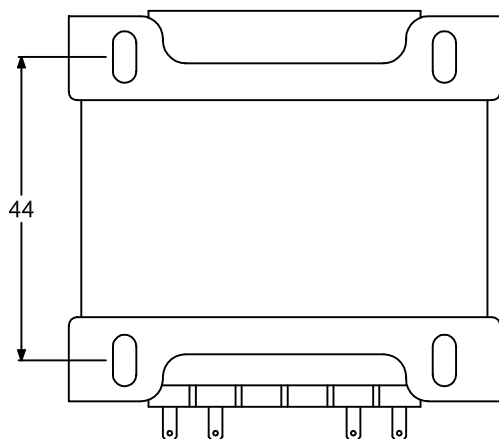

# PRODUCT DATASHEET

## 100VA CHASSIS MOUNTED TRANSFORMER

### Connection Diagrams for D3677

