


PRODUCT DATASHEET

0.35VA PCB MOUNTED ENCAPSULATED TRANSFORMER

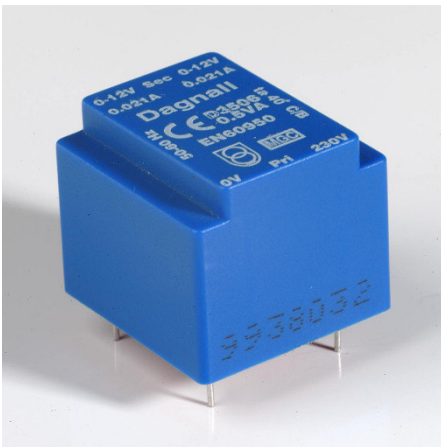

- Complies with **EN60950**
- Inherently Short circuit proof
- CE Marked
- Single 230V primary
- Comprehensive choice of secondary voltages
- UL94-V0 Vacuum Encapsulated Construction
- Suitable for flow soldering

Weight	0.025	Kg	Approvals
Typical Regulation	45	%	
Frequency	50/60	Hz	
Max Ambient	40	°C	
Bobbin Material	UL94-V0 Class "B" 130		

Part No	Primary	Secondary	Secondary Fuse
D3500	230	6+6	Not Required. All Parts Inherently Short-Circuit Proof.
D3501	230	9+9	
D3502	230	12+12	
D3503	230	15+15	

Please see sheet 2 for dimensions, pin outs and connection information.


Dagnall Electronics Ltd
 Tel : +44 (0)117 230 2240
sales@dagnall.co.uk
www.dagnall.co.uk

TRX Electronics Ltd
 Tel : (00356)21 663011
info@trxelectronics.com
www.trxelectronics.com


PRODUCT DATASHEET

0.35VA PCB MOUNTED ENCAPSULATED TRANSFORMER

Outline Drawing

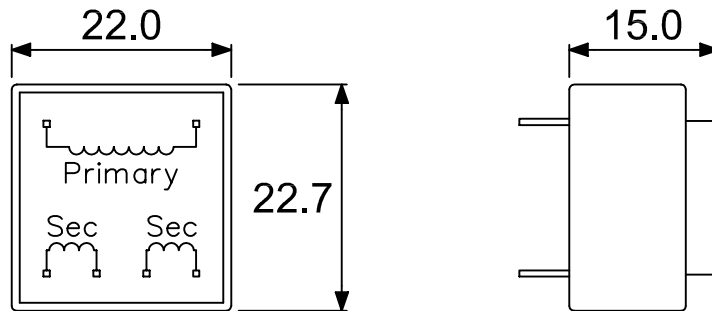

Pin Grid

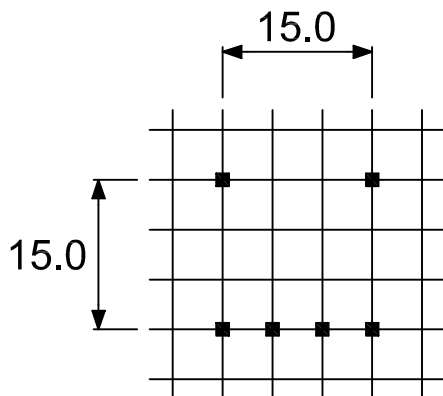

PCB Pins 0.6mm dia
Pin length 5.0mm
Hole size 1.0mm

5mm pin grid

Connection Diagrams for D3500

