


# PRODUCT DATASHEET

## 0.5VA PCB MOUNTED ENCAPSULATED TRANSFORMER

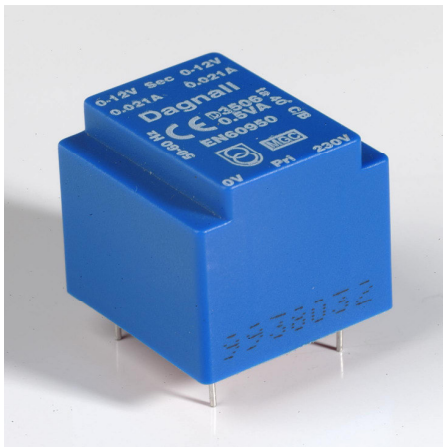

- Complies with **EN60950**
- Inherently Short circuit proof
- CE Marked
- Single 230V primary
- Comprehensive choice of secondary voltages
- UL94-V0 Vacuum Encapsulated Construction
- Suitable for flow soldering

Weight	0.040	Kg	Approvals
Typical Regulation	45	%	
Frequency	50/60	Hz	
Max Ambient	40	°C	
Bobbin Material	UL94-V0 Class "B" 130		

Part No	Primary	Secondary	Secondary Fuse
D3504	230	6+6	Not Required. All Parts Inherently Short-Circuit Proof.
D3505	230	9+9	
D3506	230	12+12	
D3507	230	15+15	

Please see sheet 2 for dimensions, pin outs and connection information.


Dagnall Electronics Ltd  
 Tel : +44 (0)117 230 2240  
[sales@dagnall.co.uk](mailto:sales@dagnall.co.uk)  
[www.dagnall.co.uk](http://www.dagnall.co.uk)

TRX Electronics Ltd  
 Tel : (00356)21 663011  
[info@trxelectronics.com](mailto:info@trxelectronics.com)  
[www.trxelectronics.com](http://www.trxelectronics.com)


**PRODUCT DATASHEET**

**0.5VA PCB MOUNTED ENCAPSULATED TRANSFORMER**

Outline Drawing

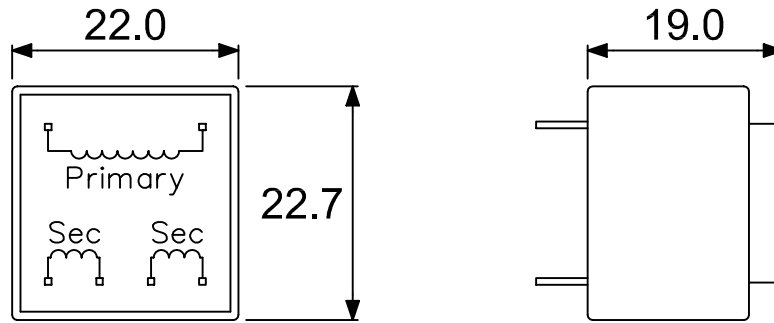

Pin Grid

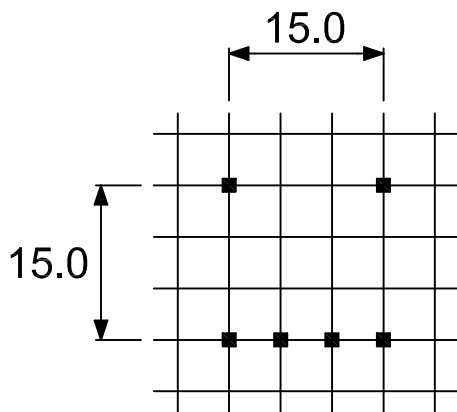

PCB Pins 0.6mm dia  
Pin length 5.0mm  
Hole size 1.0mm

5mm pin grid

Connection Diagrams for D3504

