

# PRODUCT DATASHEET

## 1.2VA PCB MOUNTED ENCAPSULATED TRANSFORMER



Manufactured to **BS415 Class 2, VDE0550**

**Class 2 and IEC742 Class 2.**

Single 240V primary.

Centre tapped Secondaries total rating 1.2VA.

Rugged Encapsulated Construction.

Suitable for flow soldering.


4.4kV Isolation Primary to Secondary.

Weight	0.105	Kg
Typical Regulation	21	%
Frequency	50/60	Hz
Max Ambient	25	°C
Bobbin Material	UL94-HB Class "B" 130°C	


Part No	Primary	Secondary	Secondary Fuse
D3600	240v	4.5-0-4.5v	0.125AT
D3601	240v	6-0-6v	0.100AT
D3602	240v	9-0-9v	0.063AT
D3603	240v	12-0-12v	0.050AT
D3604	240v	15-0-15v	0.040AT
D3605	240v	20-0-20v	0.032AT

**PRODUCT DATASHEET**

**1.2VA PCB MOUNTED ENCAPSULATED TRANSFORMER**  
Outline Drawing

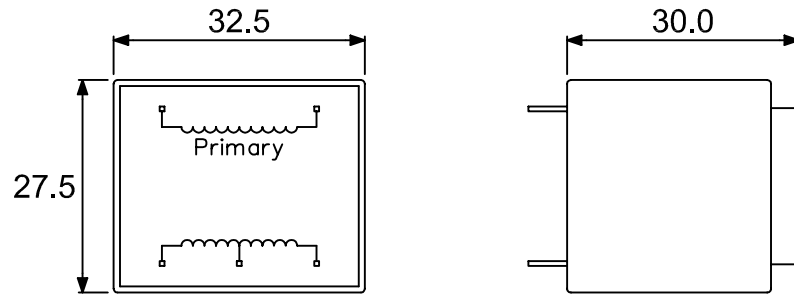

**Pin Grid**

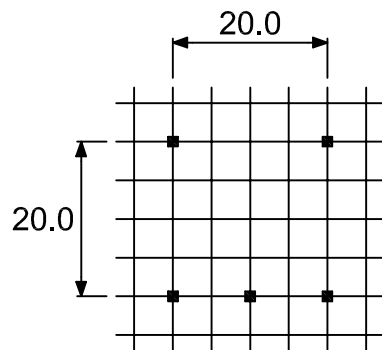

PCB Pins 0.635mm Sq  
Pin length 3.0mm  
Hole size 1.0mm

5mm pin grid

**Connection Diagrams for D3600**

