

PRODUCT DATASHEET

13VA SHORT CIRCUIT PROOF TRANSFORMER



Complies with **EN60950**

Short circuit proof via internal PTC

CE Marked

Single 230V Primary

Comprehensive choice of secondary voltages

UL94-V0 Vacuum Encapsulated Construction

Suitable for flow soldering

Weight	0.42	Kg	
Typical Regulation	19	%	
Frequency	50/60	Hz	
Max Ambient	40	°C	
Bobbin Material	UL94-V0 Class "B" 130		

Part No	Primary	Secondary	Reccomended Secondary Fuse
D2191	230	6+6	Not Required Short-Circuit Proof Design
D2192	230	9+9	
D2193	230	12+12	
D2194	230	15+15	
D2195	230	18+18	

Please see sheet 2 for dimensions, pin outs and connection information.


Dagnall Electronics Ltd
 Tel : +44 (0)117 230 2240
sales@dagnall.co.uk
www.dagnall.co.uk

TRX Electronics Ltd
 Tel : (00356)21 663011
info@trxelectronics.com
www.trxelectronics.com


PRODUCT DATASHEET

13VA SHORT CIRCUIT PROOF TRANSFORMER

Outline Drawing

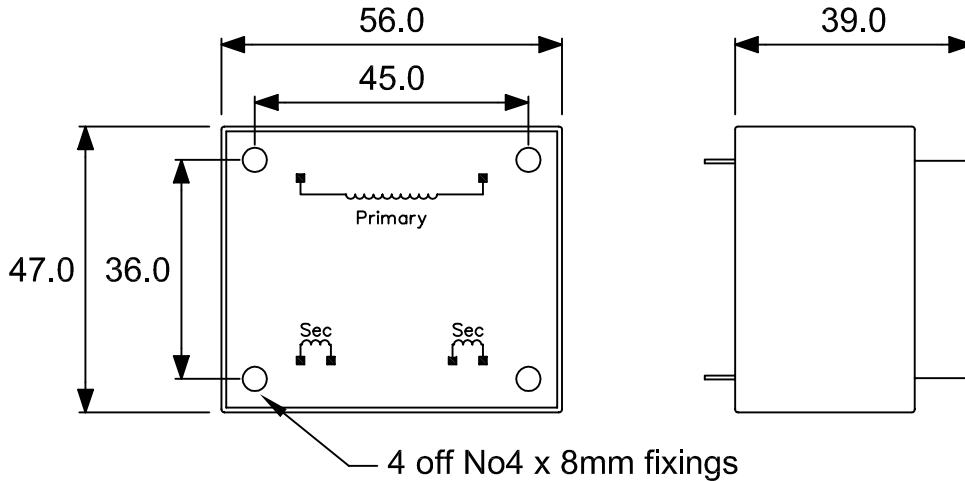

Pin Grid

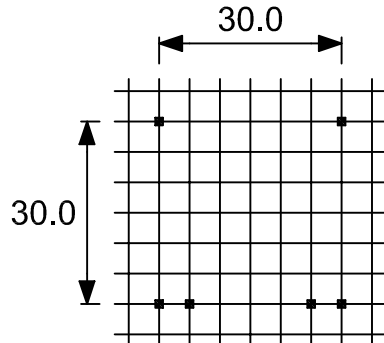

PCB Pins 0.635mm Sq
Pin length 5.0mm
Hole size 1.0mm

5mm pin grid

Connection Diagrams for D2191

