

# PRODUCT DATASHEET

## 4.5VA SHORT CIRCUIT PROOF TRANSFORMER



Complies with **EN60950**

Short circuit proof via internal PTC

CE Marked

Single 230V Primary

Comprehensive choice of secondary voltages

UL94-V0 Vacuum Encapsulated Construction

Suitable for flow soldering

Weight	0.19	Kg	
Typical Regulation	25	%	
Frequency	50/60	Hz	
Max Ambient	40	°C	
Bobbin Material	UL94-V0 Class "B" 130		

Part No	Primary	Secondary	Reccomended Secondary Fuse
D2181	230	6+6	Not Required, Short-Circuit Proof Design
D2182	230	9+9	
D2183	230	12+12	
D2184	230	15+15	
D2185	230	18+18	

Please see sheet 2 for dimensions, pin outs and connection information.


Dagnall Electronics Ltd  
 Tel : +44 (0)117 230 2240  
[sales@dagnall.co.uk](mailto:sales@dagnall.co.uk)  
[www.dagnall.co.uk](http://www.dagnall.co.uk)

TRX Electronics Ltd  
 Tel : (00356)21 663011  
[info@trxelectronics.com](mailto:info@trxelectronics.com)  
[www.trxelectronics.com](http://www.trxelectronics.com)


**PRODUCT DATASHEET**

**4.5VA SHORT CIRCUIT PROOF TRANSFORMER**

Outline Drawing

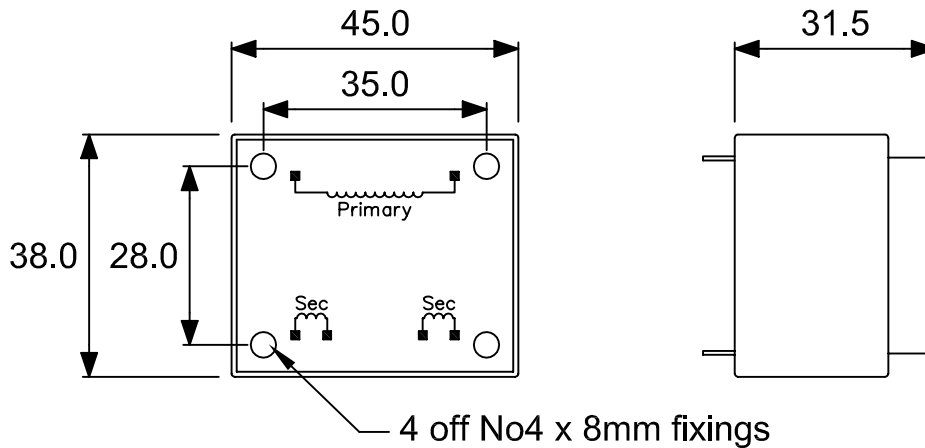

Pin Grid

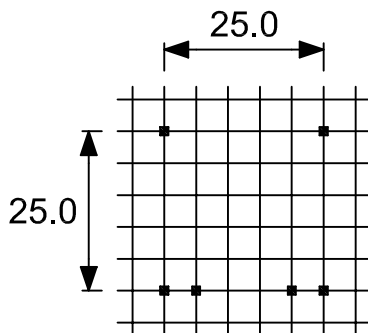

PCB Pins 0.635mm Sq  
Pin length 5.0mm  
Hole size 1.0mm

5mm pin grid

Connection Diagrams for D2181

