

PRODUCT DATASHEET

100VA CHASSIS MOUNTED TRANSFORMER



- DE Designed, Manufactured and tested in accordance with **BS3535, EN60742* , EN61558* , EN60950.**
- DE Single 230V or Dual 115V Primaries.
- DE CE Marked.
- DE Comprehensive choice of Secondary Voltages.
- DE Flame Retardant materials to **UL94-V0.**
- DE Fully shrouded double section construction.

Weight	1.55	Kg
Typical Regulation	10	%
Frequency	50/60	Hz
Max Ambient	25	°C
Bobbin Material	UL94-V0 Class "B" 130°C	

*requires additional over-current /over-temperature protection.

Please see sheet 2 for dimensions, pin outs and connection information.

Part Numbers


Part No	Primary	Secondary	Recommended Secondary Fuse
D3066	230V	9+9V	5AT
D3067	230V	12+12V	4AT
D3068	230V	15+15V	3.15AT
D3069	230V	50+50V	1AT
D3070	115+115V	9+9V	5AT
D3071	115+115V	12+12V	4AT
D3072	115+115V	15+15V	3.15AT
D3073	115+115V	50+50V	1AT

Please see sheets 3 and 4 for dimensions, pin outs and connection information.

PRODUCT DATASHEET

100VA CHASSIS MOUNTED TRANSFORMER

Outline Drawing 230V Version

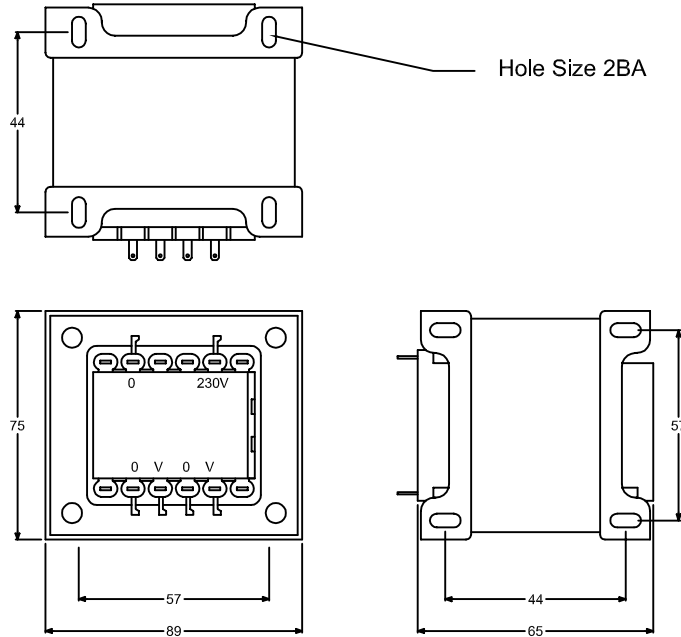

Outline Drawing Dual 115V Version

