


PRODUCT DATASHEET

20VA CHASSIS MOUNTED TRANSFORMER

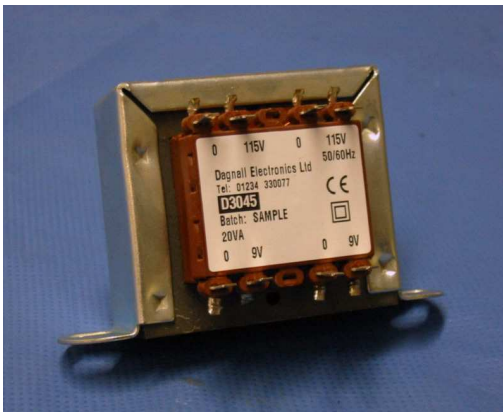

Designed, manufactured and tested in accordance with;

BS3535, EN60742*, EN61558*, EN60950

CE Marked

Single 230V or Dual 115V primaries

Comprehensive choice of secondary voltages

Flame retardant bobbins and shrouds

Fully shrouded construction

Weight	0.55	Kg
Typical Regulation	12	%
Frequency	50/60	Hz
Max Ambient	25	°C
Bobbin Material	UL94-V0 Class "B" 130°C	

* requires additional over-current / over-temperature protection.

Dagnall Electronics Ltd
Tel : +44 (0)117 230 2240
sales@dagnall.co.uk
www.dagnall.co.uk

TRX Electronics Ltd
Tel : (00356)21 663011
info@trxelectronics.com
www.trxelectronics.com

Please see sheet 2 for part numbers.

Iss 1 10/01/12

2 of 3

Part Numbers


Part No	Primary	Secondary	Recommended Secondary Fuse
D3040	230V	6+6V	2AT
D3041	230V	9+9V	1AT
D3042	230V	12+12V	1AT
D3043	230V	15+15V	0.8AT
D3044	115+115V	6+6V	2AT
D3045	115+115V	9+9V	1AT
D3046	115+115V	12+12V	1AT
D3047	115+115V	15+15V	0.8AT

Please see sheets 3 for dimensions and pin outs.

PRODUCT DATASHEET

20VA CHASSIS MOUNTED TRANSFORMER

Outline Drawing 230V Version

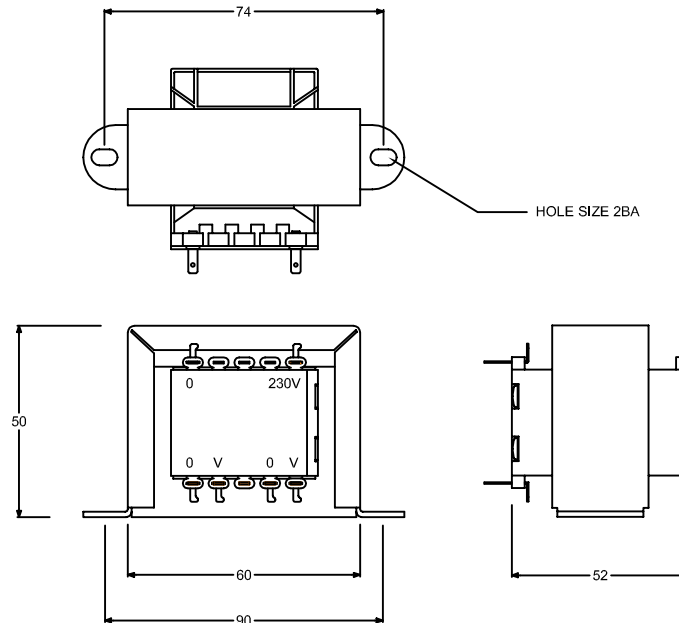

Outline Drawing Dual 115V Version

