


# PRODUCT DATASHEET

## 10VA LOW PROFILE ENCAPSULATED TRANSFORMER

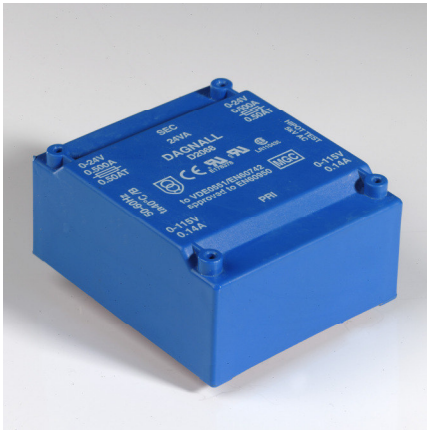

Complies with: **EN60950 UL506 cUL506 & CSA 22.2 #1**

CE Marked

Dual 115V Primaries

Comprehensive choice of secondary voltages

5KV Isolation between primary and secondary windings.

UL94-V0 Vacuum Encapsulated Construction

Suitable for flow soldering

Identical footprint from 10VA to 30VA

Weight	0.270	Kg	
Typical Regulation	24	%	
Frequency	50/60	Hz	
Max Ambient	40	°C	
Bobbin Material	UL94-V0	"B" 130 °C	


Part No	Primary	Secondary	Reccomended Secondary Fuse
D2036	115+115	6+6	0.800AT
D2037	115+115	9+9	0.500AT
D2038	115+115	12+12	0.400AT
D2039	115+115	15+15	0.315AT
D2092	115+115	18+18	0.250AT
D2067	115+115	24+24	0.200AT

Please see sheet 2 for outline drawing and connection info.

## PRODUCT DATASHEET


### 10VA LOW PROFILE

Outline Drawing

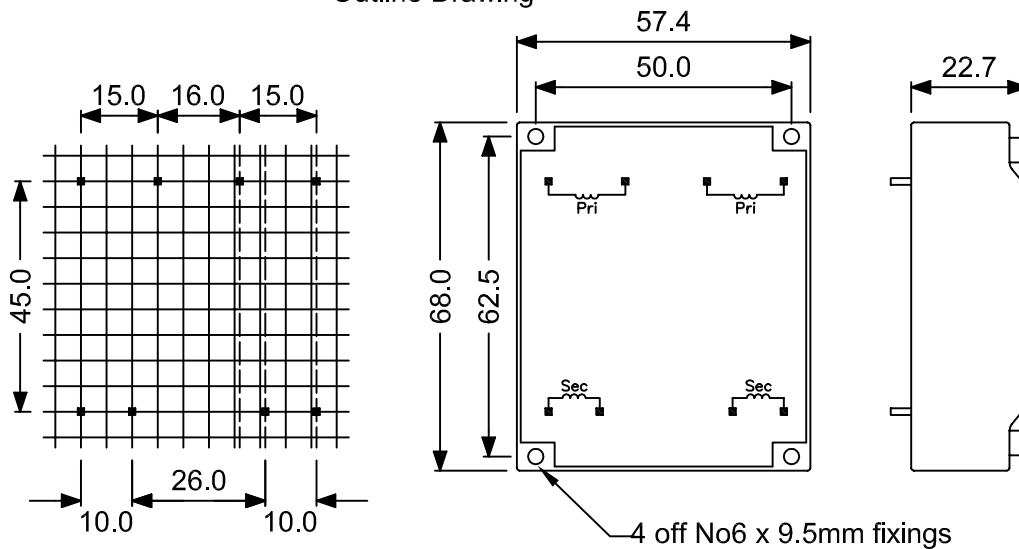

5mm pin grid  
PCB Pins 0.635mm sq  
Pin length 5.0mm Hole size 1.0mm

Connection Diagrams for D2036 - 230V supply

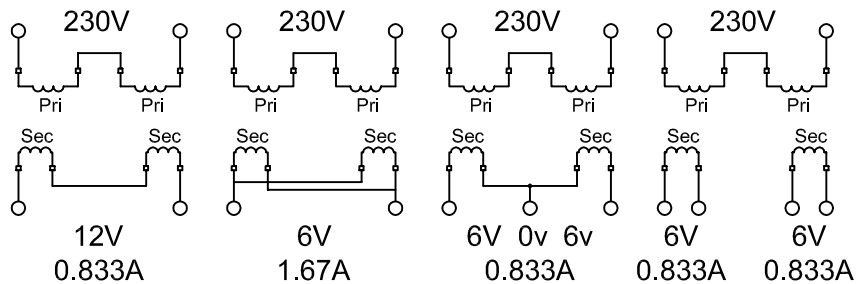

Connection Diagrams for D2201 - 115V supply

