


PRODUCT DATASHEET

30VA LOW PROFILE ENCAPSULATED TRANSFORMER

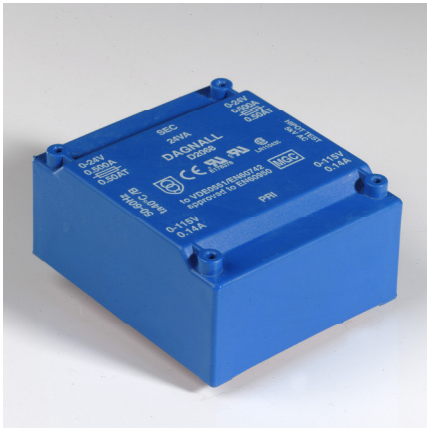

Complies with: **EN60950 UL506 cUL506 & CSA 22.2 #1**

CE Marked

Dual 115V Primaries

Comprehensive choice of secondary voltages

5KV Isolation between primary and secondary windings.

UL94-V0 Vacuum Encapsulated Construction

Suitable for flow soldering

Identical footprint from 10VA to 30VA

Weight	0.540	Kg	
Typical Regulation	15	%	
Frequency	50/60	Hz	
Max Ambient	40	°C	
Bobbin Material	UL94-V0	"B" 130 °C	

Part No	Primary	Secondary	Reccomended Secondary Fuse
D2048	115+115	6+6	2.500AT
D2049	115+115	9+9	1.600AT
D2050	115+115	12+12	1.250AT
D2051	115+115	15+15	1.000AT
D2095	115+115	18+18	0.800AT
D2799 #1	115+115	24+24	0.630AT


Please see sheet 2 for outline drawing and connection info.

Dagnall Electronics Ltd
 Tel : +44 (0)117 230 2240
sales@dagnall.co.uk
www.dagnall.co.uk

TRX Electronics Ltd
 Tel : (00356)21 663011
info@trxelectronics.com
www.trxelectronics.com


PRODUCT DATASHEET

30VA LOW PROFILE

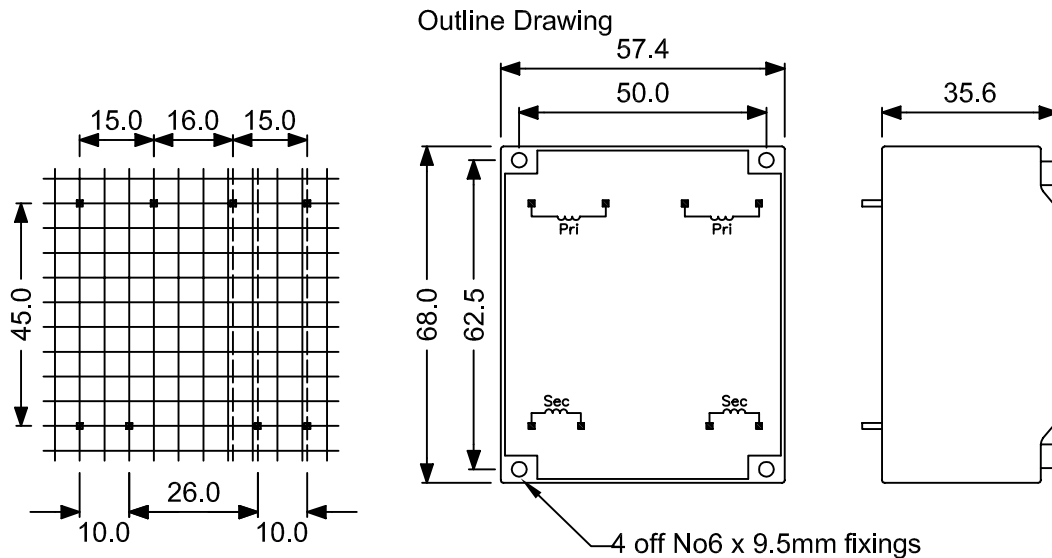

5mm pin grid
PCB Pins 0.635mm sq
Pin length 5.0mm Hole size 1.0mm

Connection Diagrams for D2048 - 230V supply

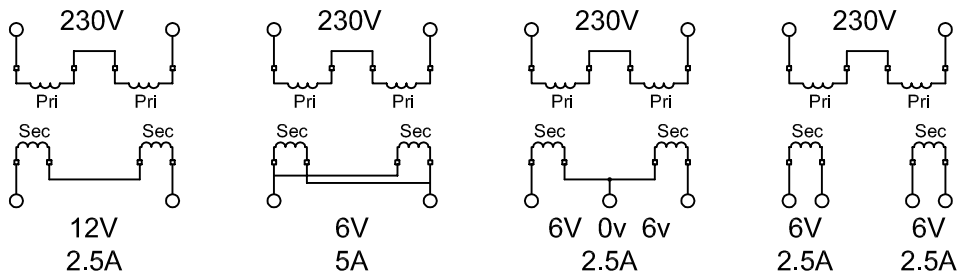

Connection Diagrams for D2048 - 115V supply

