

PRODUCT DATASHEET

12VA CHASSIS MOUNTED TRANSFORMER



Designed, Manufactured and tested in accordance with **BS3535, EN60742*, EN61558***.

Dual Primaries. For use with 110, 220, 240V

4000V Isolation Primary – Secondary

Comprehensive choice of Secondary Voltages.

Fully shrouded double section construction.

Weight	0.4	Kg
Typical Regulation	12	%
Frequency	50/60	Hz
Max Ambient	25	°C
Bobbin Material	UL94-HB Class "B" 130°C	

*requires additional over-current /over-temperature protection.

Please see sheet 2 for dimensions, pin outs and connection information.

Dagnall Electronics Ltd
Tel : +44 (0)117 230 2240
sales@dagnall.co.uk
www.dagnall.co.uk

TRX Electronics Ltd
Tel : (00356)21 663011
info@trxelectronics.com
www.trxelectronics.com

Part Numbers


<i>Part No</i>	Primary	Secondary	Recommended Secondary Fuse
D3637	0 -110 0-110-130V	4.5+4.5V	1.25AT
D3638	0 -110 0-110-130V	6+6V	1AT
D3639	0 -110 0-110-130V	9+9V	0.63AT
D3640	0 -110 0-110-130V	10V	1.25AT
D3641	0 -110 0-110-130V	12+12V	0.5AT
D3642	0 -110 0-110-130V	15+15V	0.4AT
D3643	0 -110 0-110-130V	18+18V	0.315AT
D3644	0 -110 0-110-130V	20+20V	0.315AT
D3645	0 -110 0-110-130V	24+24V	0.25AT

Please see sheets 3 and 4 for dimensions, pin outs and connection information.

PRODUCT DATASHEET

Multi Primary 12VA


Outline Drawing

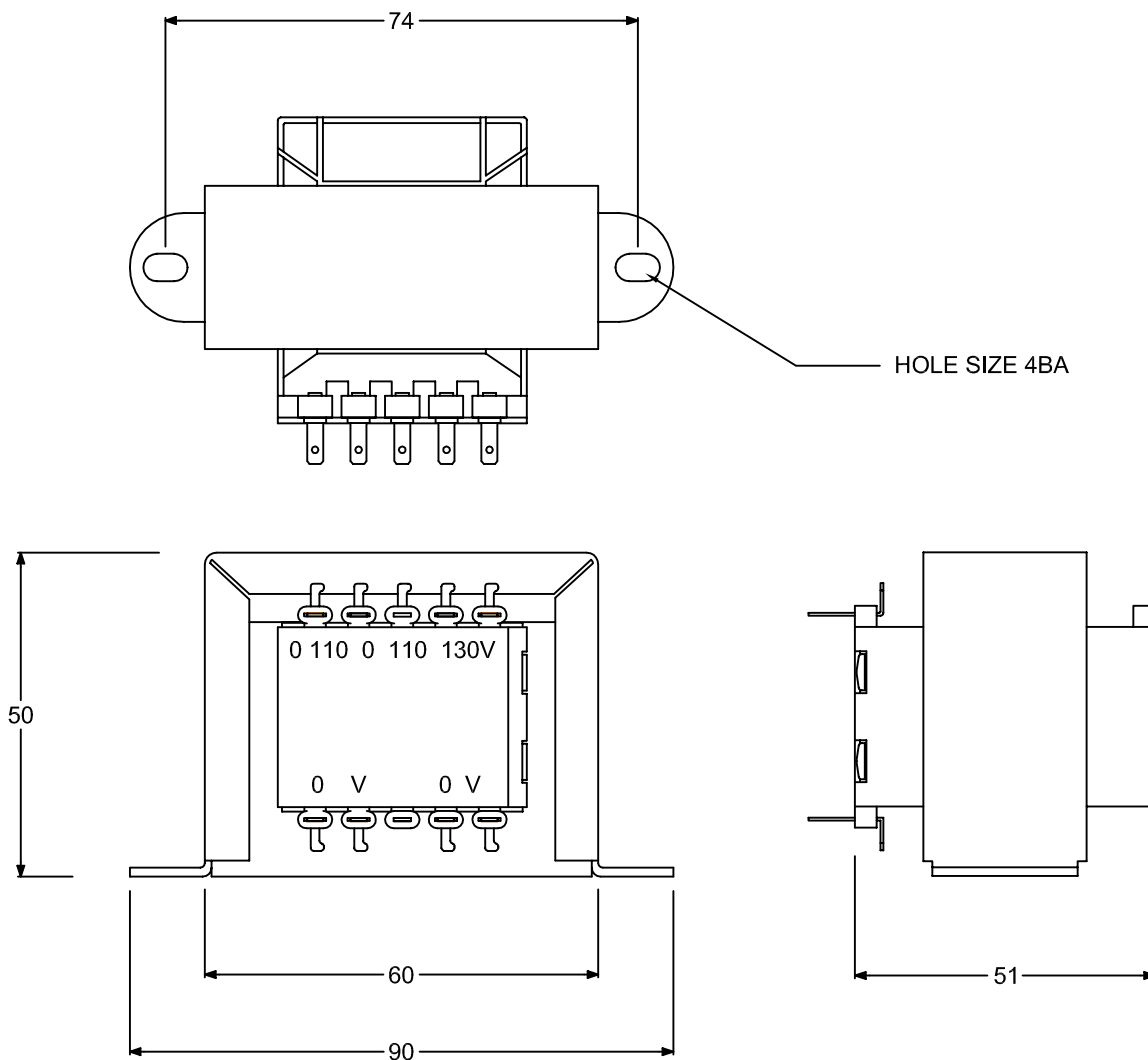


PRODUCT DATASHEET

Multi Primary 12VA

Connection Diagrams for D3637 110V Supply

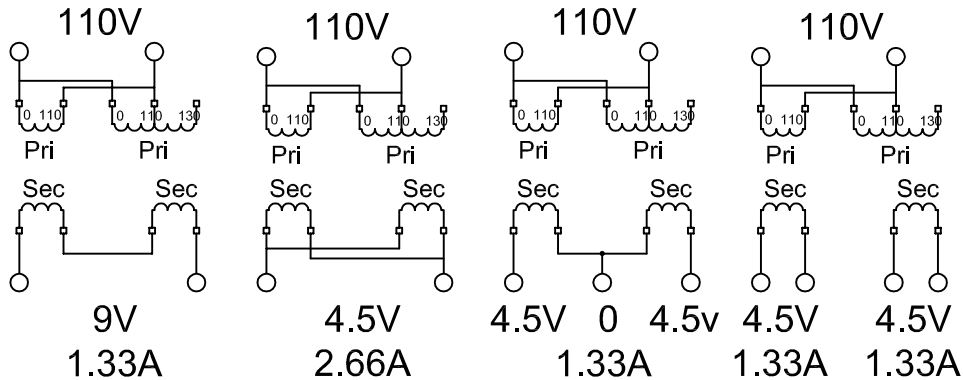

Connection Diagrams for D3637 - 220V supply

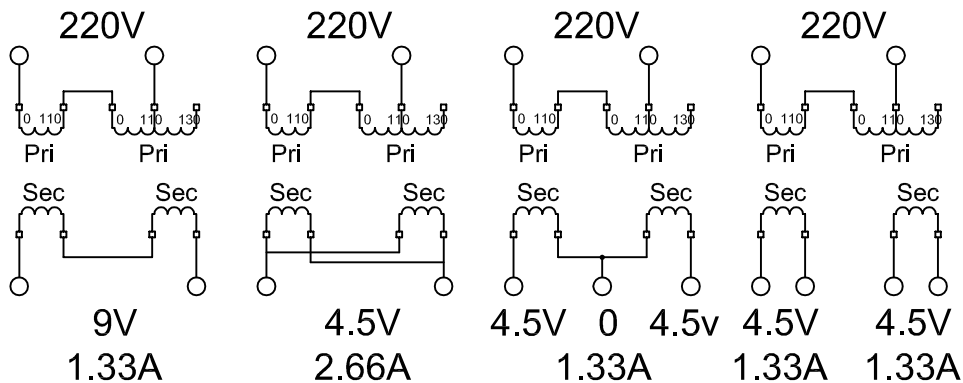

Connection Diagrams for D3637 - 240V supply

