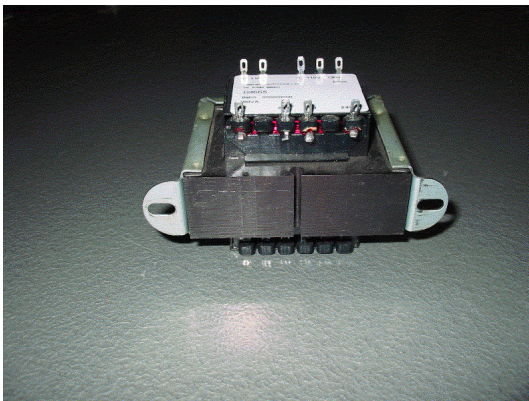


PRODUCT DATASHEET**50VA CHASSIS MOUNTED TRANSFORMER**

Designed, Manufactured and tested in accordance with **BS3535, EN60742* , EN61558* , BS415.**

Dual Primaries. For use with 110, 220, 240 input
4000V isolation Primary - Secondary

Comprehensive choice of Secondary Voltages.

Fully shrouded double section construction.

Weight	1.0	Kg
Typical Regulation	10	%
Frequency	50/60	Hz
Max Ambient	25	°C
Bobbin Material	UL94-HB Class "B" 130°C	

*requires additional over-current /over-temperature protection.

Please see sheet 2 for part numbers.




Part Numbers

<i>Part No</i>	Primary	Secondary	Recommended Secondary Fuse
D3657	0-110 0-110-130V	4.5+4.5V	5.0AT
D3658	0-110 0-110-130V	6+6V	4.0AT
D3659	0-110 0-110-130V	9+9V	2.5AT
D3660	0-110 0-110-130V	10V	5.0AT
D3661	0-110 0-110-130V	12+12V	2.0AT
D3662	0-110 0-110-130V	15+15V	1.60AT
D3663	0-110 0-110-130V	18+18V	1.5AT
D3664	0-110 0-110-130V	20+20V	1.25AT
D3665	0-110 0-110-130V	24+24V	1.00AT

Please see sheets 3 and 4 for dimensions, pin outs and connection information.

PRODUCT DATASHEET

50VA CHASSIS MOUNTED TRANSFORMER

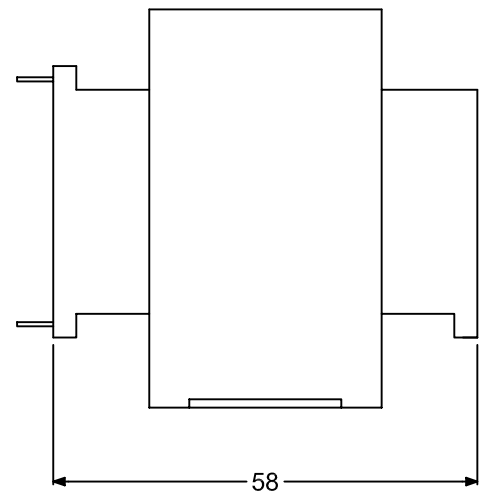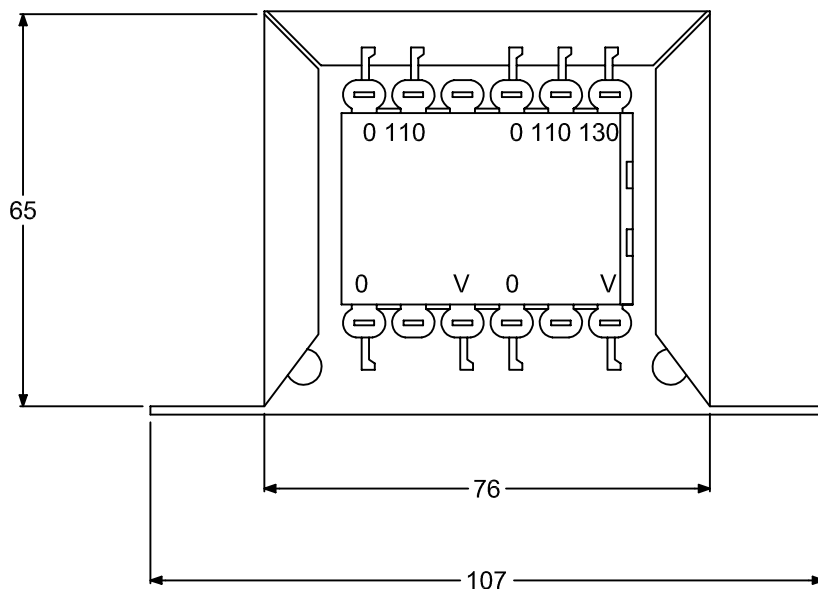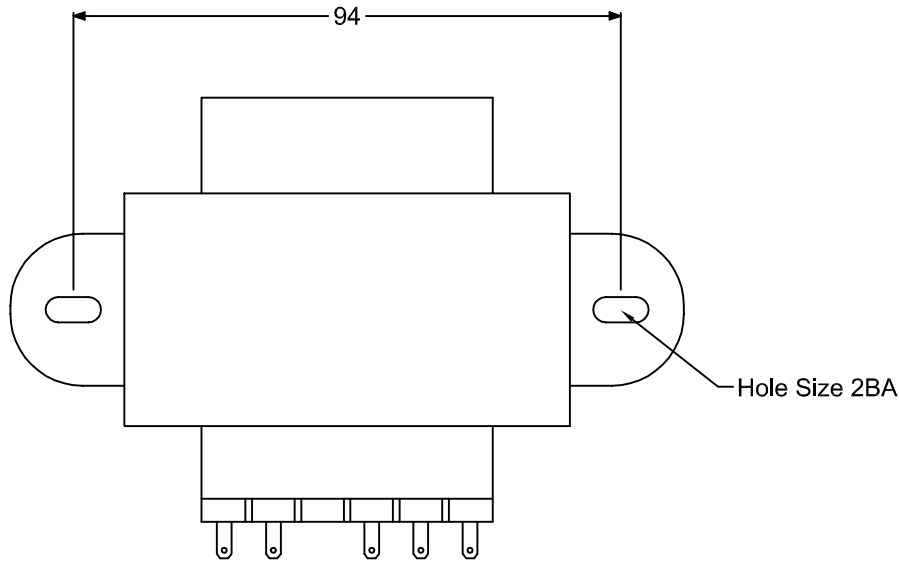

PRODUCT DATASHEET

50VA CHASSIS MOUNTED TRANSFORMER

Connection Diagrams for D3657

