

PRODUCT DATASHEET

6VA CHASSIS MOUNTED TRANSFORMER



Designed, Manufactured and tested in accordance with **BS3535, EN60742*, EN61558*, BS415.**

Dual Primaries. For use with 110, 220, 240 Input
4000V Isolation Primary – Secondary

Comprehensive choice of Secondary Voltages.

Fully shrouded double section construction.

Weight	0.18	Kg
Typical Regulation	24	%
Frequency	50/60	Hz
Max Ambient	25	°C
Bobbin Material	UL94-HB Class "B" 130°C	

*requires additional over-current /over-temperature protection.

Please see sheet 2 for dimensions, pin outs and connection information.

Part Numbers




<i>Part No</i>	Primary	Secondary	Recommended Secondary Fuse
D3628	0 -110 0-110-130V	4.5+4.5V	0.63AT
D3629	0 -110 0-110-130V	6+6V	0.50AT
D3630	0 -110 0-110-130V	9+9V	0.315AT
D3631	0 -110 0-110-130V	12+12V	0.250AT
D3632	0 -110 0-110-130V	15+15V	0.200AT
D3633	0 -110 0-110-130V	18+18V	0.160AT
D3634	0 -110 0-110-130V	20+20V	0.160AT
D3635	0 -110 0-110-130V	24+24V	0.125AT

Please see sheets 3 and 4 for dimensions, pin outs and connection information.

PRODUCT DATASHEET

6VA CHASSIS MOUNTED TRANSFORMER


Outline Drawing

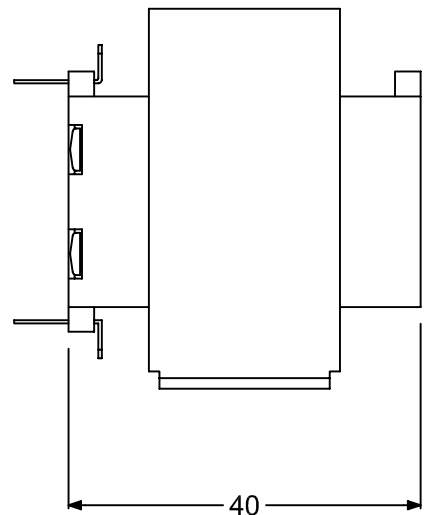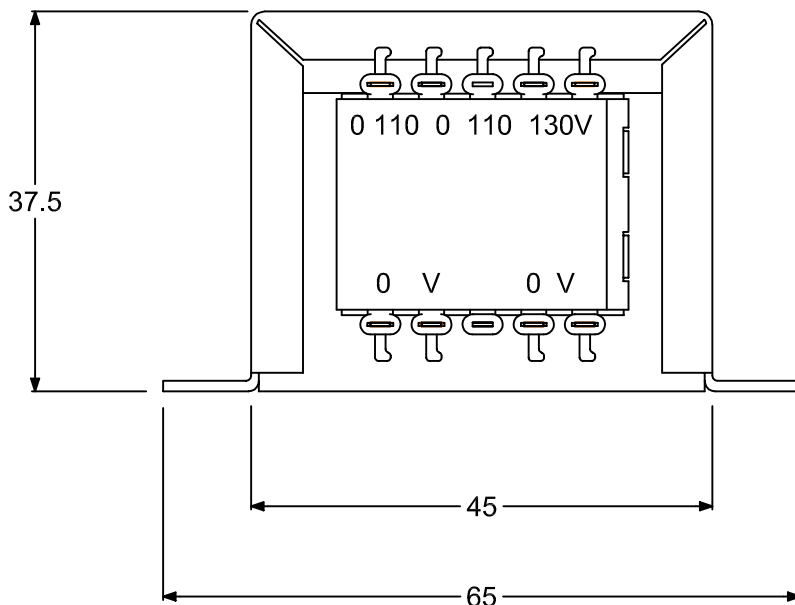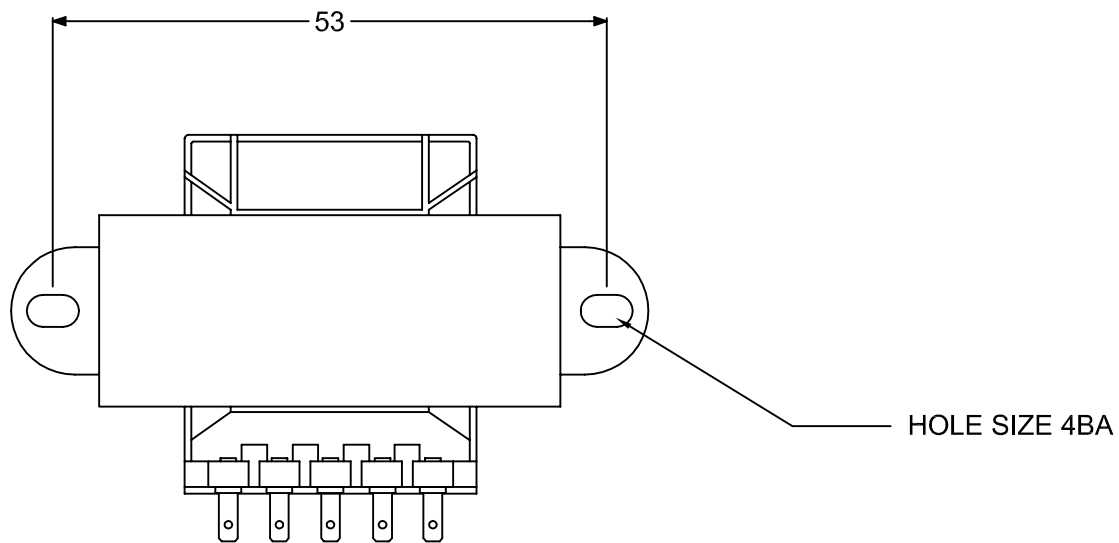


PRODUCT DATASHEET

6VA CHASSIS MOUNTED TRANSFORMER

Connection Diagrams for D3628 110V Supply

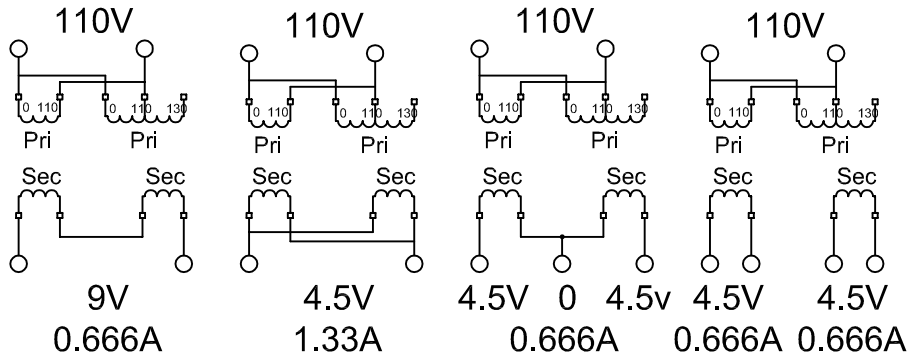

Connection Diagrams for D3628 - 220V supply

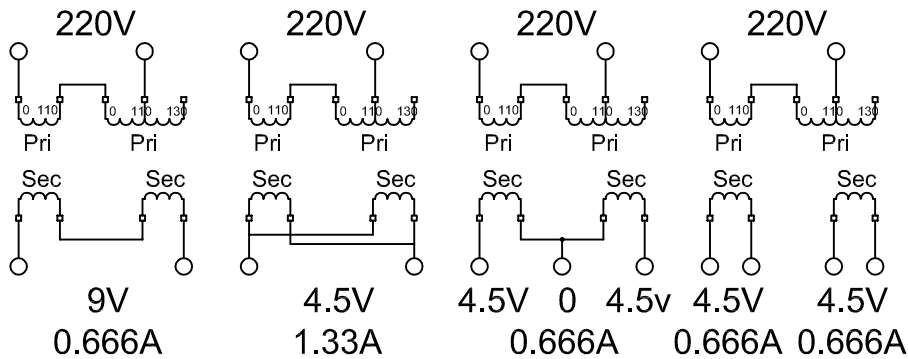

Connection Diagrams for D3628 - 240V supply

