

## PRODUCT DATASHEET

### 75VA CHASSIS MOUNTED TRANSFORMER



Designed, Manufactured and tested in accordance with **BS3535**, **EN60742\***, **EN61558\***, **BS415**.

Dual Primaries. For use with 110, 220, 240 input  
4000V isolation Primary - Secondary

Comprehensive choice of Secondary Voltages.

Fully shrouded double section construction.

Weight	1.45	Kg
Typical Regulation	8	%
Frequency	50/60	Hz
Max Ambient	25	°C
Bobbin Material	UL94-HB Class "B" 130°C	

\*requires additional over-current /over-temperature protection.

Please see sheet 2 for part numbers.




## Part Numbers

Part No	Primary	Secondary	Recommended Secondary Fuse
D3667	0-110 0-110-130V	6+6V	6.3AT
D3668	0-110 0-110-130V	9+9V	4.0AT
D3669	0-110 0-110-130V	12+12V	3.15AT
D3670	0-110 0-110-130V	15+15V	2.5AT
D3671	0-110 0-110-130V	18+18V	2.0AT
D3672	0-110 0-110-130V	20+20V	2.0AT
D3673	0-110 0-110-130V	24+24V	1.6AT
D3674	0-110 0-110-130V	30+30V	1.25AT
D3675	0-110 0-110-130V	50+50V	0.75AT

Please see sheets 3 and 4 for dimensions, pin outs and connection information.

# PRODUCT DATASHEET

## 75VA CHASSIS MOUNTED TRANSFORMER

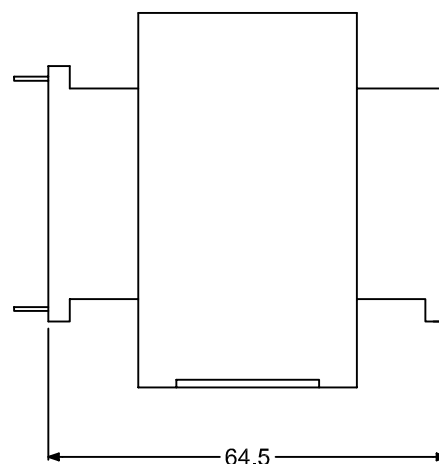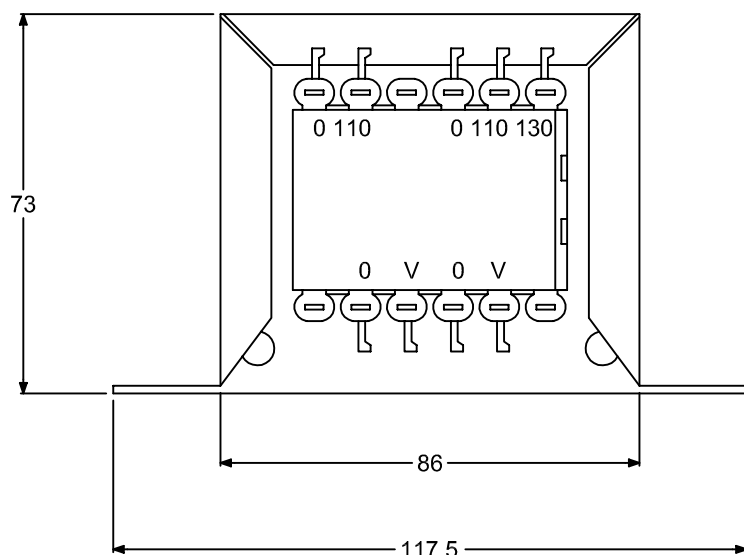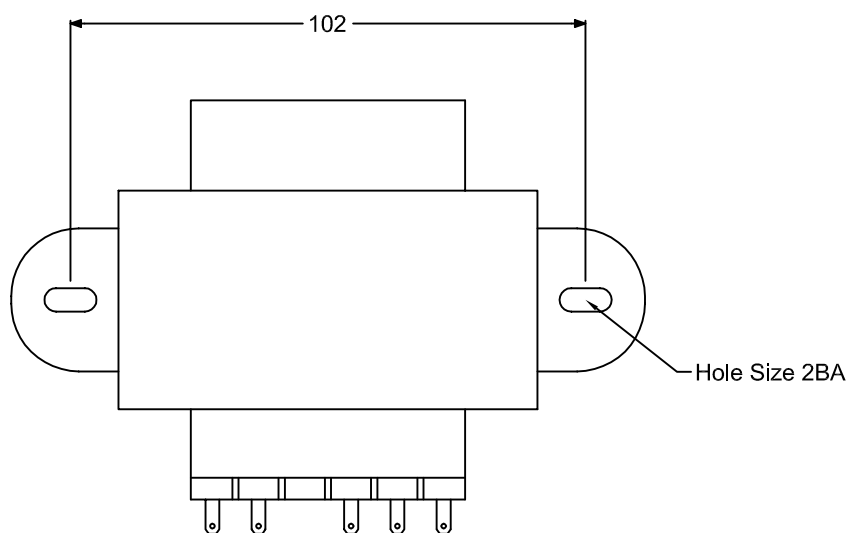

**PRODUCT DATASHEET**

**75VA CHASSIS MOUNTED TRANSFORMER**

Connection Diagrams for D3667

