

## PRODUCT DATASHEET

### 12VA PCB MOUNTED TRANSFORMER



Designed, manufactured and tested in accordance with **BS415**

CE Marked

Dual Primaries, for 110, 220 and 240V inputs

Comprehensive choice of secondary voltages

Fully shrouded double section construction

4KV Isolation Primary to Secondary

Suitable for Flow Soldering

Weight	0.4	Kg
Typical Regulation	12	%
Frequency	50/60	Hz
Max Ambient	25	°C
Bobbin Material	UL94-HB Class "B" 130°C	

Please see sheet 2 for part numbers.

## Part Numbers


Part No	Primary	Secondary	Recommended Secondary Fuse
D3621	0-110 0-110-130V	6+6V	1.000AT
D3622	0-110 0-110-130V	9+9V	0.630AT
D3623	0-110 0-110-130V	10V	1.250AT
D3624	0-110 0-110-130V	12+12V	0.500AT
D3625	0-110 0-110-130V	15+15V	0.400AT
D3626	0-110 0-110-130V	20+20V	0.315AT
D3627	0-110 0-110-130V	24+24V	0.250AT
D3621	0-110 0-110-130V	6+6V	1.000AT

Please see sheets 3 for dimensions and pin outs.



**PRODUCT DATASHEET**

**12VA PCB MOUNTED TRANSFORMER**

Outline Drawing Dual Secondary version

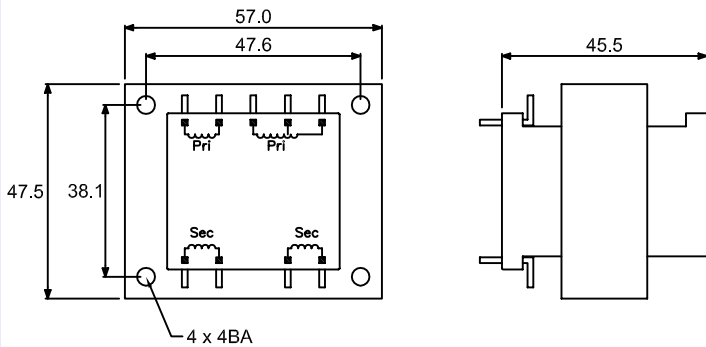

Outline Drawing Single Secondary Version

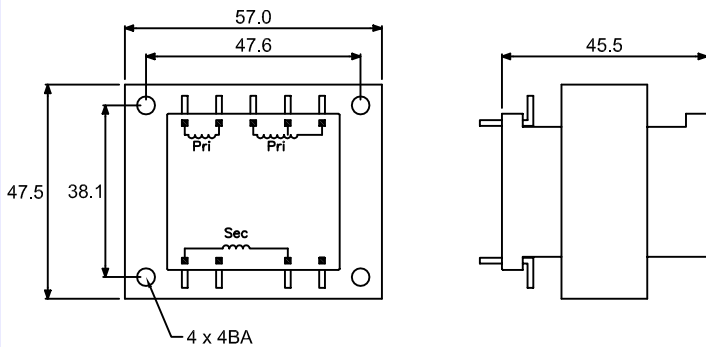

Pin Grid

PCB Pins 1.5x0.5  
Pin length 5.7mm  
Hole size 2.0mm

2.54mm (0.1") pin grid

Connection Diagrams for D3621

