

PRODUCT DATASHEET

18VA TRIPLE OUTPUT TRANSFORMER



Complies with **EN60950**

CE Marked

Dual Primaries

Secondaries of 9V and 14.5-0-14.5V ideal for +5V DC and 12-0-12V DC rails

5KV Isolation between primary and secondary windings.

UL94-V0 Vacuum Encapsulated Construction

Suitable for flow soldering

Weight	0.380	Kg	
Typical Regulation	20	%	
Frequency	50/60	Hz	
Max Ambient	40	°C	
Bobbin Material	UL94-V0	"B" 130 °C	

Part No	Primary	Secondary	Secondary Fuse
D2198	115+115	9v @ 0.750A	0.80AT
		14.5-0-14.5 @ 0.230A	0.250AT

Please see sheet 2 for outline drawing and connection information.


Dagnall Electronics Ltd
 Tel : +44 (0)117 230 2240
sales@dagnall.co.uk
www.dagnall.co.uk

TRX Electronics Ltd
 Tel : (00356)21 663011
info@trxelectronics.com
www.trxelectronics.com

PRODUCT DATASHEET

18VA Triple Output

Outline Drawing

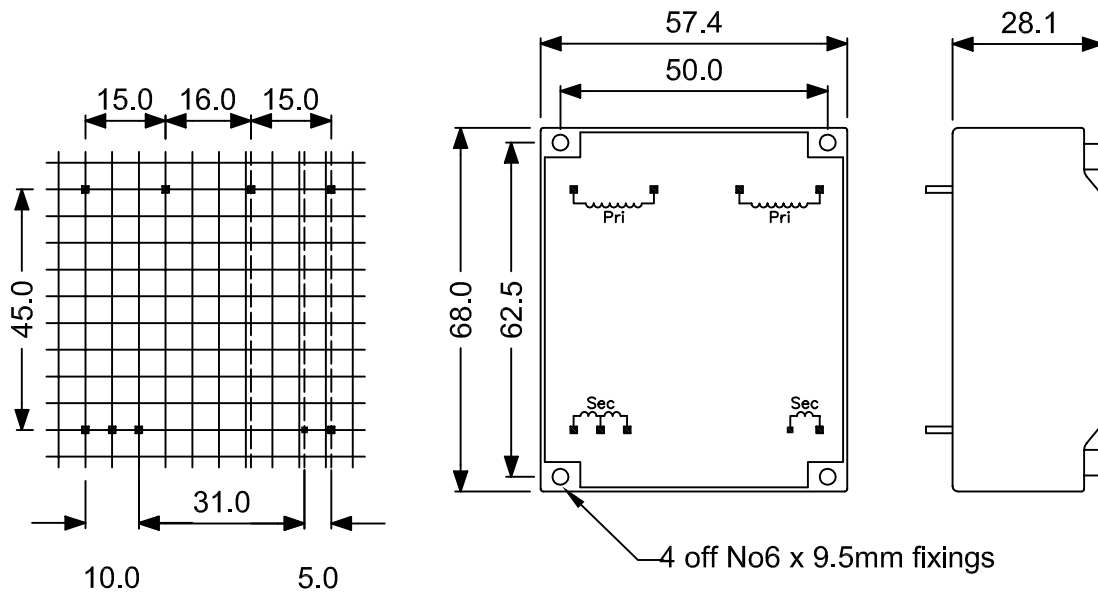

5mm pin grid
PCB Pins 0.635mm sq
Pin length 5.0mm Hole size 1.0mm

Connection Diagrams for D2198

