

PRODUCT DATASHEET

30VA TRIPLE OUTPUT TRANSFORMER



Complies with **EN60950**

CE Marked

Dual Primaries

Secondaries of 9V and 14.5-0-14.5V ideal for +5V DC and 12-0-12V DC rails

5KV Isolation between primary and secondary windings.

UL94-V0 Vacuum Encapsulated Construction

Suitable for flow soldering

| | | | |
|--------------------|---------|------------|--|
| Weight | 0.54 | Kg | |
| Typical Regulation | 18 | % | |
| Frequency | 50/60 | Hz | |
| Max Ambient | 40 | °C | |
| Bobbin Material | UL94-V0 | "B" 130 °C | |

| Part No | Primary | Secondary | Secondary Fuse |
|---------|---------|----------------------|----------------|
| D2200 | 115+115 | 9v @ 1.50A | 1.6AT |
| | | 14.5-0-14.5 @ 0.450A | 0.5AT |

Please see sheet 2 for outline drawing and connection information.


Dagnall Electronics Ltd
 Tel : +44 (0)117 230 2240
sales@dagnall.co.uk
www.dagnall.co.uk

TRX Electronics Ltd
 Tel : (00356)21 663011
info@trxelectronics.com
www.trxelectronics.com

PRODUCT DATASHEET

30VA Triple Output

Outline Drawing

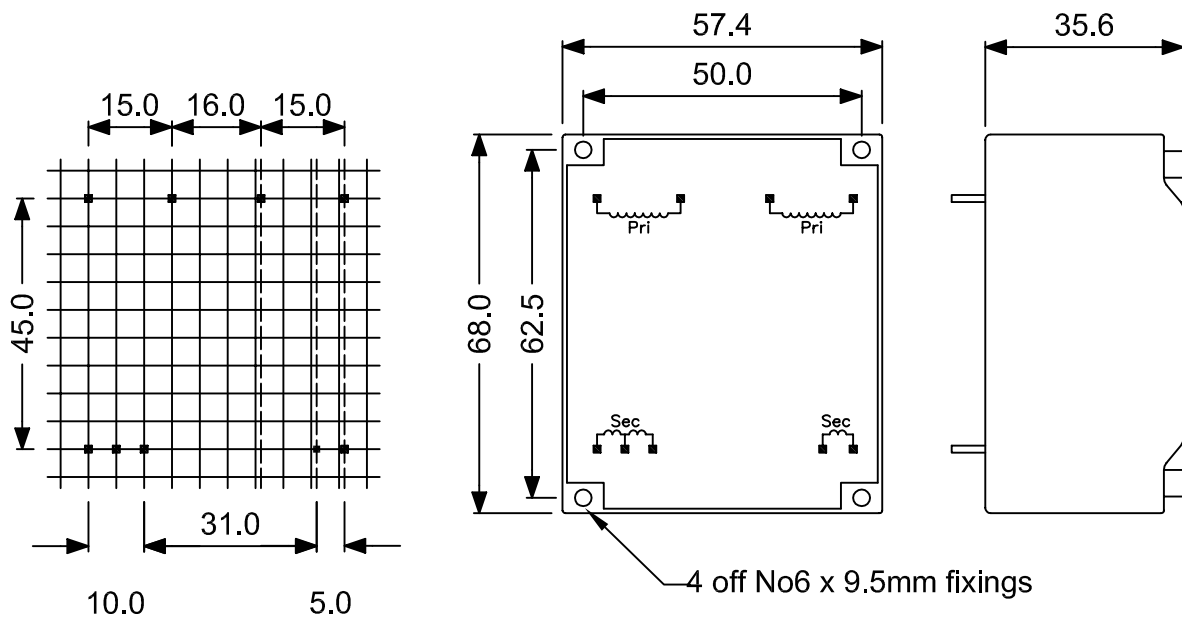

5mm pin grid
PCB Pins 0.635mm sq
Pin length 5.0mm Hole size 1.0mm

Connection Diagrams for D2200

